



www.omsvibro.com


OVR SERIES

**EXCAVATOR
MOUNTED
VIBRO HAMMER**

OVR Series

Excavator Mounted Vibro Hammers

Standard (S)

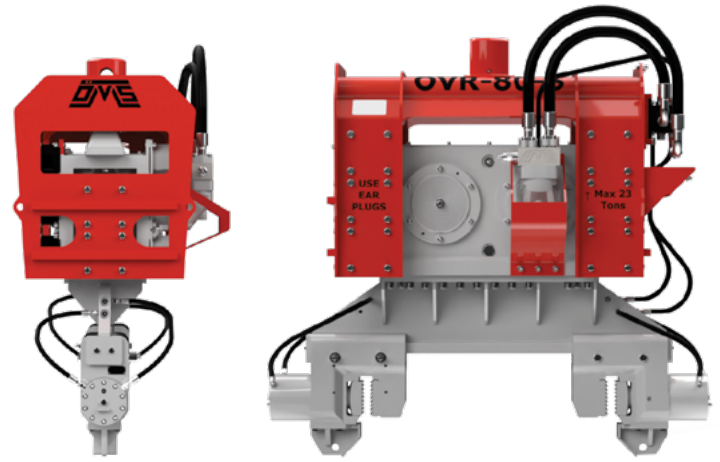

Metric System

Technical Specifications	20 S	40 S	50 S	60 S	70 S	80 S	120 S
Eccentric Moment (kgm)	2.1	4	5.2	6.3	7.3	9	12.3
Centrifugal Force (kN)	140	276	354	434	502	615	838
Frequency (rpm)	2500	2500	2500	2500	2500	2500	2500
Oil Flow (lpm)	62	100	150	201	233	275	313
Power (kW)	33	53	80	107	124	147	167
Amplitude (mm)	16	15	14	16	16	14	19
Pulling Force (kN) Max.	59	88	147	147	147	235	235

Weight and Dimensions



Dyn. Weight W/O Clamp (kg)	270	534	749	771	929	1255	1292
Total Weight W/O Clamp (kg)	384	786	1080	1096	1253	1740	1798
Length / L1 (mm)	755	1200	1282	1282	1343	1473	1506
Height / H1 (mm)	-	-	-	1581	1639	1716	1850
Height / H2 (mm)	891	762	835	835	893	970	1030
Height / H3 (mm)	1226	1203	1344	1344	1402/1476	1553	1647
Width / W1 (mm)	456	735	778	778	804	890	842

Clamps for Sheet Piles	SCN 20	SCN 30	SCN 60	SCN 60	SCN 60/75	SCN 75	SCN 100
Width / W2 (mm)	220	230	320	320	320 / 320	320	320
Clamping Force (kN)	203	304	643	643	643 / 814	814	1005
Weight (kg)	88	192	327	327	327 / 502	502	620

Clamps for Casing	-	-	-	KCN 45x2	KCN 45x2	KCN 45x2	KCN 60 x 2
Diameter (min.-max.) / D (mm)	-	-	-	350 - 670	350 - 670	350 - 970	360 - 940
Clamping Force (kN)	-	-	-	465 x 2	465 x 2	465 x 2	643 x 2
Weight (kg)	-	-	-	185 x 2	185 x 2	185 x 2	307 x 2

Recommended Excavator Working Weight (ton)

	6 - 12	18 - 22	24 - 26	25 - 30	30 - 36	36 - 40	40 - 50
--	--------	---------	---------	---------	---------	---------	---------

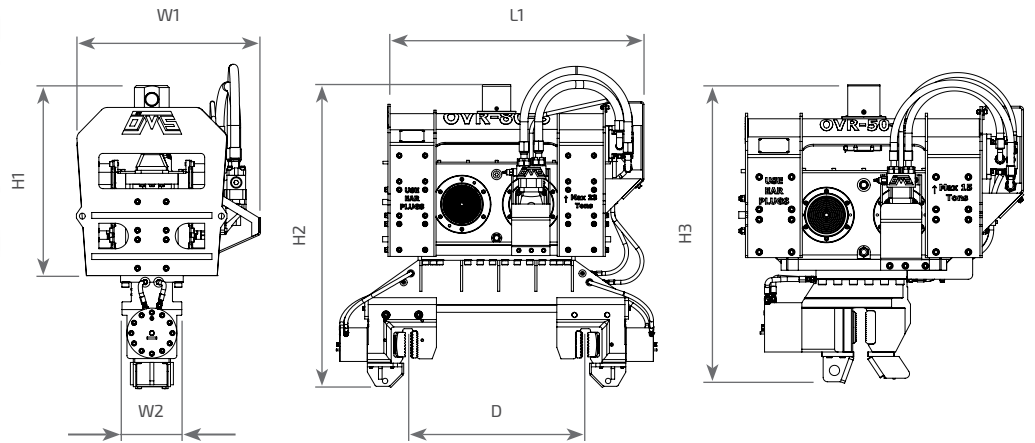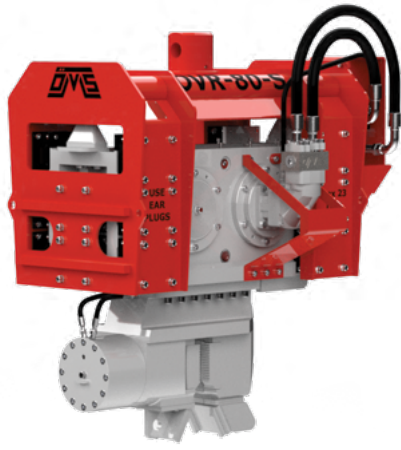

Imperial System

Technical Specifications	20 S	40 S	50 S	60 S	70 S	80 S	120 S
Eccentric Moment (lbs.in)	182	347	451	547	634	781	1068
Centrifugal Force (tons)	16	31	40	49	56	69	94
Frequency (rpm)	2500	2500	2500	2500	2500	2500	2500
Oil Flow (gpm)	16	26	40	53	62	73	83
Power (hP)	44	71	107	143	166	197	224
Amplitude (in)	0.6	0.6	0.6	0.6	0.6	0.6	0.7
Pulling Force (tons) Max.	7	10	17	17	17	26	26

Weight and Dimensions

Dyn. Weight W/O Clamp (lbs)	595	1177	1651	1700	2048	2767	2848
Total Weight W/O Clamp (lbs)	847	1733	2381	2416	2762	3836	3964
Length / L1 (in)	30	47	50	50	53	58	59
Height / H1 (in)	-	-	-	62	65	68	73
Height / H2 (in)	35	30	33	33	35	38	41
Height / H3 (in)	48	47	53	53	55/58	61	65
Width / W1 (in)	18	29	31	31	32	35	33

Clamps for Sheet Piles	SCN 20	SCN 30	SCN 60	SCN 60	SCN 60 / 75	SCN 75	SCN 100
Width / W2 (in)	9	9	13	13	13 / 13	13	13
Clamping Force (tons)	23	34	72	72	72 / 92	92	113
Weight (lbs)	194	423	721	721	721 / 1107	1107	1367

Clamps for Casing	-	-	-	KCN 45x2	KCN 45x2	KCN 45x2	KCN 60 x 2
Diameter (min.-max.) / D (in)	-	-	-	14 - 26	14 - 26	14 - 38	14 - 37
Clamping Force (tons)	-	-	-	52x2	52x2	52x2	145
Weight (lbs)	-	-	-	408x2	408x2	408x2	1354

Recommended Excavator Working Weight (ton)


	6 - 12	18 - 22	24 - 26	25 - 30	30 - 36	36 - 40	40 - 50
--	--------	---------	---------	---------	---------	---------	---------



EXCAVATOR MOUNTED VIBRO HAMMER
OVR 50 S // ITALY


Selection Chart

Excavator Mounted Vibro Hammers

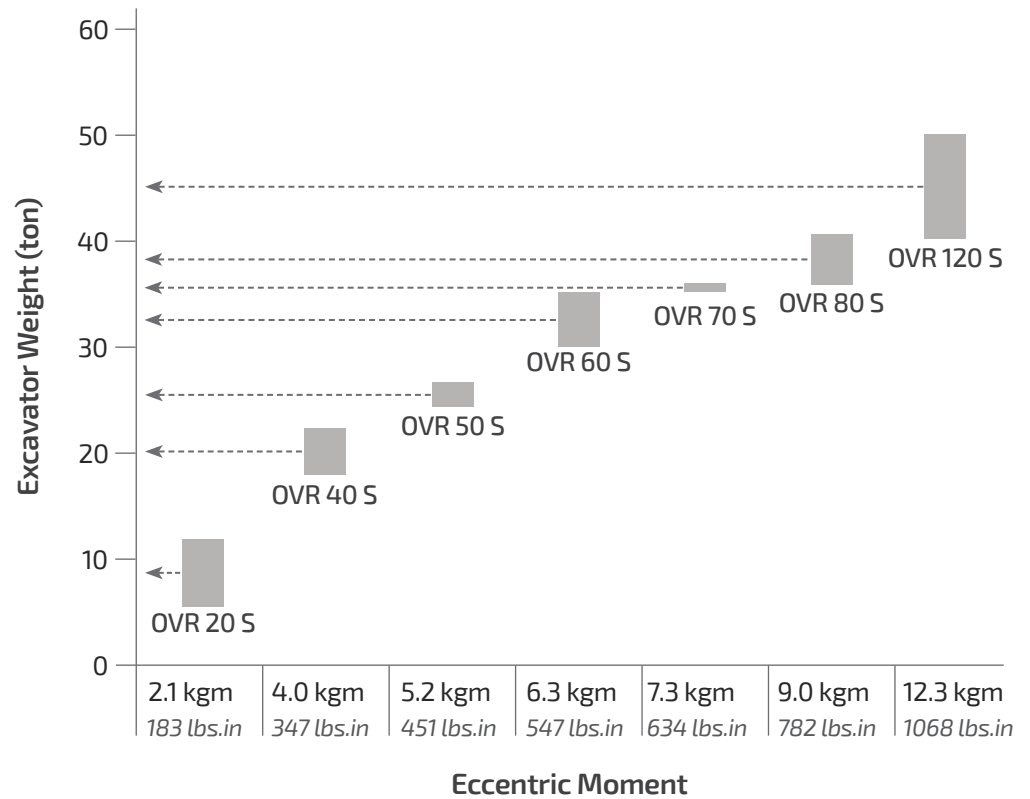

Oil Pressure & Oil Flow (Optimum)

Excavator Mounted Vibro Hammers

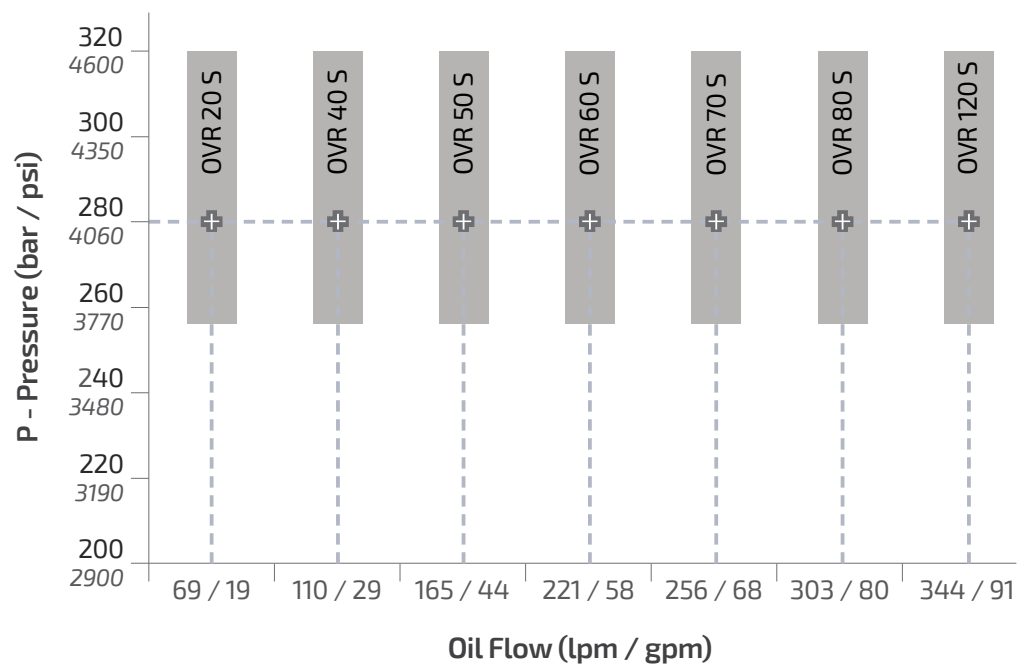



EXCAVATOR MOUNTED VIBRO HAMMER
OVR 120 S // SAUDI ARABIA



Specially designed OVR excavator mounted vibro hammers are easily adapted to the excavator by connection bracket produced by OMS. These are hydraulically driven by the excavators and easily operated by the excavator operators. OVR series excavator mounted vibro hammers do not require any modifications on the excavators.

High Performance and Pile Driving / Extracting Power!..

With its ergonomic design and high performance, OMS excavator mounted vibro hammers with various capacities provide long lasting, problem free piling applications.

OVR series vibro hammers can be used with all types of piles by means of OMS hydraulic clamps and, thus provide time and cost efficiency.


Advantages

- Wide range of products,
- Fast, reliable and easy excavator connection,
- Ergonomic design providing practical use,
- Safe movement around link yoke,
- High-performance and driving/extracting power,
- Minimum vibration transmission to its surrounding.
- Double or single clamping the steel tube piles can be driven easily and powerfully,
- Powerful, reliable and long-life.

OVR Series




Excavator Mounted Vibro Hammers

Variable Moment (VM)

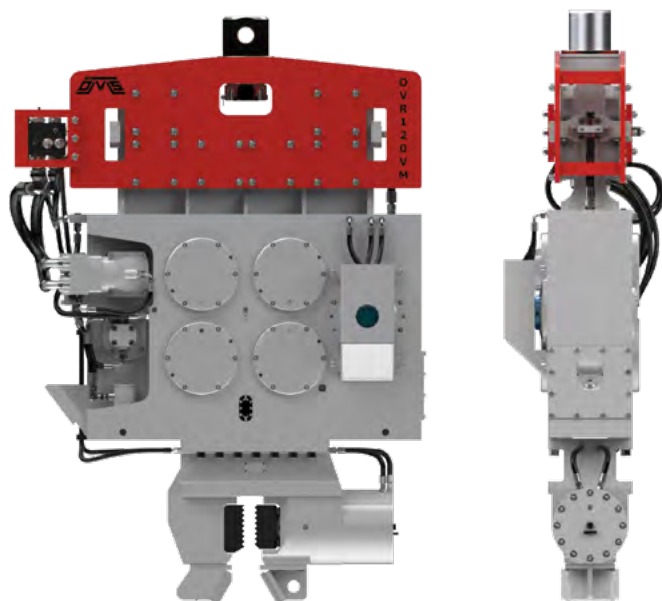

Metric System

Technical Specifications	OVR 80 VM	OVR120VM
Eccentric Moment	0 - 8	0 - 12
Centrifugal Force	464	698
Frequency (rpm)	2300	2300
Oil Flow (lpm)	176	362
Power (kW)	103	193
Amplitude (mm)	12	14
Pulling Force (kN) Max.	147	177
Weight and Dimensions		
Dyn. Weight W/O Clamp (kg)	1337	1750
Total Weight W/O Clamp (kg)	1650	2160
Length / L1 (mm)	1280	1566
Height / H1 (mm)	1680	1614
Height / H2 (mm)	2075	2245
Width / W1 (mm)	255	314
Width / W2 (mm)	471	511
Clamps for Sheet Piles	SCN 60	SCN 100
Clamping Force (kN)	643	1005
Weight (kg)	327	620
Clamps for Casing	KCN 45x2	KCN 45x2
Diameter (min.-max.) / D (mm)	350 - 970	350 - 970
Clamping Force (kN)	465 x 2	465 x 2
Weight (kg)	185 x 2	185 x 2
Recommended Excavator Working Weight (ton)		
	36 - 40	40 - 50

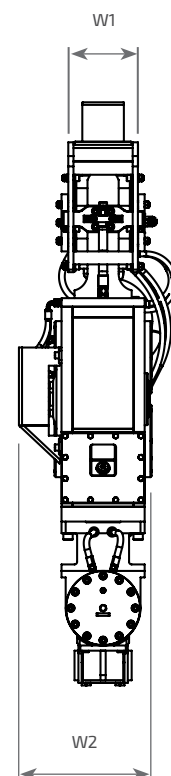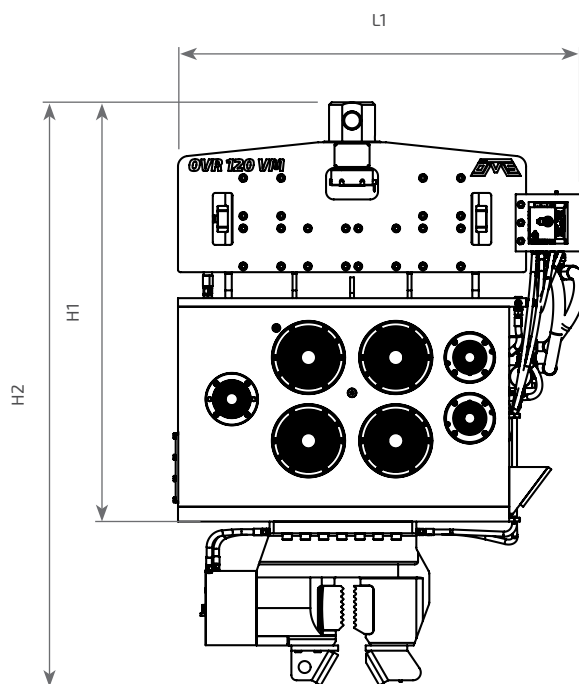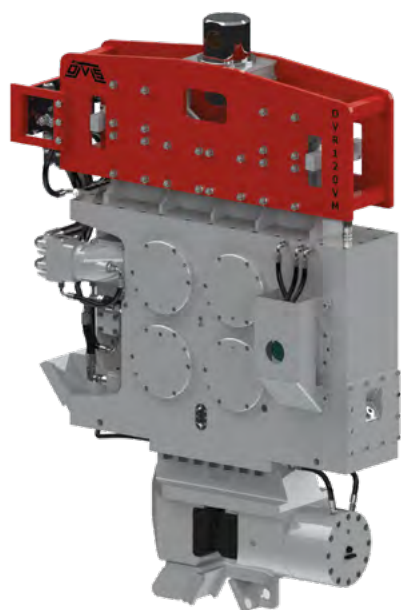

Imperial System

Technical Specifications	OVR 80 VM	OVR120 VM
Eccentric Moment (in.lbs)	0 - 694	0 - 1042
Centrifugal Force (tons)	52	78
Frequency (rpm)	2300	2300
Oil Flow (gpm)	46	96
Power (hP)	138	259
Amplitude (in)	0.5	0.6
Pulling Force (tons) Max.	17	20

Weight and Dimensions

Dyn. Weight W/O Clamp (lbs)	2948	3858
Total Weight W/O Clamp (lbs)	3637	4762
Length / L1 (in)	50	62
Height / H1 (in)	66	64
Height / H2 (in)	82	88
Width / W1 (in)	10	12
Width / W2 (in)	19	20

Clamps for Sheet Piles	SCN 60	SCN 100
Clamping Force (tons)	72	113
Weight (lbs)	721	1367

Clamps for Casing	KCN 45x2	KCN 45x2
Diameter (min.-max.) / D (in)	14 - 38	14 - 38
Clamping Force (tons)	52x2	52x2
Weight (lbs)	408x2	408x2

Recommended Excavator Working Weight (ton)

36 - 40	40 - 50
---------	---------



Amplitude / eccentric moment can easily be adjusted between its minimum and maximum by variable moment technology.

The variable moment technology (phase shifter mechanism) of SVR Variable Moment Vibratory Hammers is to adjust the position of eccentric masses with respect to the resonance free starting and stopping of vibration case.

Scan the code with your mobile camera or with a QR reader app to watch the working video of OVR 70 VM.



VARIABLE MOMENT VIBRO HAMMER
OVR 70 VM // TURKIYE

*Suitable for
near historical
buildings to use
with variable
(resonance - free)
models.*

Advantages

- Environmentally friendly technology,
- Controlled amplitude by means of adjustable eccentric moment,
- Resonance free start - stop,
- Optimum force application to the ground through variable moment feature,
- Minimized sound transmission through high-capacity anti-vibration mounts,
- Powerful, reliable and long life.



VARIABLE MOMENT VIBRO HAMMER
ÖVR 70 VM // TURKIYE





OMS Vibro Website



OVR 70 VM Video



OMS Pile Driving Equipment



oms@omsvibro.com



in



/ omsvibro

OMS Vibro Hammer Catalog

OMS has the right to change indicated technical data without prior notice.

OMS - OVR - R1 - 0825 © All rights reserved.

www.omsvibro.com